


R-5T *New* 12G-SDI Supported 3 × 5.5" LCD FHD Screen



Main Body Dimensions

Main Body 480.2 x 87.5 x 118.7 (mm) / 18.9 x 3.44 x 4.67 (inch)

Weight 2.86Kg / 6.3lbs

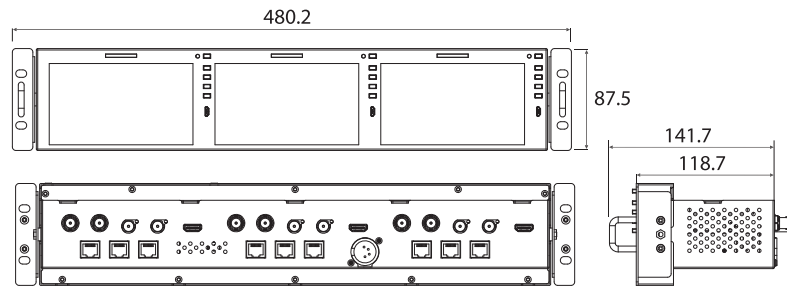

Product Highlights

- 3 × 5.5" LCD FHD Screen
- 1920 × 1080 Resolution (16:9)
- 12G / 6G / 3G-SDI Input, Output
- 1:1 Pixel Mapping Modes for SD/HD
- Waveform / Vectorscope
- Audio Level Meter
- H/V Delay
- Key Lock
- Luma(Y") Zone Check
- Time Code Display
- UMD
- User Aspect
- Various Scan Modes

Size	5.5"
Resolution	1920x1080(16:9)
Pixel Pitch	0.0213(W)×0.0639(H)mm
Color Depth	16.7M
Viewing Angle(Typ.)	160°(H) / 160°(V)
Luminance (Max.)	500cd/m ² (center)
Contrast Ratio	1000:1
Display Area	122.7(H)×69.0(V)mm

Input

2 x BNC	SDI Input (12G-SDI x 1 / 3G-SDI x 1)
1 x HDMI	HDMI Input

Output

2 x BNC	SDI Output (12G-SDI x 1 / 3G-SDI x 1) HDMI to SDI conversion output
----------------	--

Input Signal

12G-SDI	11.88Gb/s
6G-SDI	5.94Gb/s
3G-SDI	2.970Gb/s
HD-SDI	1.485Gb/s
SD-SDI	270Mb/s
HDMI	1080p(60/59.94/50/30/25/24/23.98)/ 1080i(60/59.94/50)/720p(60/50)

SDI Input Signal Formats

SMPTE ST 2082	3840x2160(60/50/59.94p)
SMPTE ST 2081	3840x2160 (30/25/24p/23.98p/29.97p)
SMPTE-425M-A/B	1080p(60/59.94/50/30/29.97/25/24/23.98/ 30sF/29.97sF/25sF/24sF/23.98sF)
SMPTE-274M	1080i(60/59.94/50) 1080p(30/29.97/25/24/24sF/23.98/23.8sF)
SMPTE-296M	720p(60/59.94/50)
SMPTE-125M	480i(59.94)
ITU-R BT.656	576i(50)

Power	DC 12V 2.5A
Power Consumption (Approx.)	35W
Operating Temperature	0°C to 45°C (32°F to 113°F)
Storage Temperature	-20°C to 60°C (-4°F to 140°F)
Basic Accessory	Rack Mountable Kit DC Power adaptor