

LEYE SDI



3D LUT



SDI



Underscan



Image Flip



Peaking Frame



Image Crop



Customized peaking range

New Peaking New Algorithm
More Intuitive More Accurate

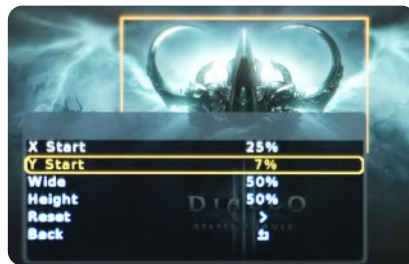


Image crop

Easily and clearly monitor the
details of your images



Multiple power supply modes

Can be powered by Canon E6
battery or 4pin aviation connector


Basic Parameters

Dimension	125x70x78mm
HDMI	4K30p
3G-SDI	1080p
Operating Power	5W
Weight	265g
USB-A	Upgrade Firmware / Load 3D LUT

Software Function

3D LUT	H/V Delay	False Color
Guides	Focus Assist	Check Field
Underscan	Osd Flip	Cross Hair
Image Flip	Histogram	Chroma
Audio Meters	Deformation	Image Crop
Grids	Luma Waveform	Tint
Zebra	Sharpness	Contrast
Image Brightness	Color Temperature	Battery Voltage Checking
Peaking Protection of Wireframe	Customized Peaking Range	
Waveform Optional Detect Data Before or After Loading 3D LUT		

PRODUCT INTRODUCTION

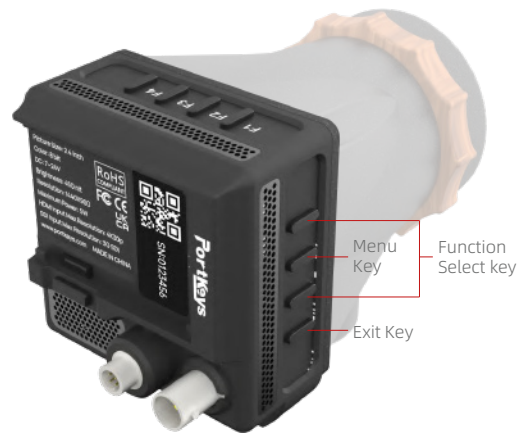

Packing List

