


LVM-095W-N 9" FHD Multi-Purpose Monitor



Size	9"
Resolution	1920 x 1080 (16:9)
Pixel Pitch	0.1035mm
Color Depth	16.7M Colors
Viewing Angle (Typ.)	176°(H) / 176°(V)
Luminance (Max.)	400nits
Contrast Ratio	750:1
Display Area	198(H) x 111(V) mm

Input	
2 x BNC	SDI A/B Channel Input
1 x HDMI	HDMI Input

Output	
1 x BNC	SDI A/B Selectable Output

Input Signal	
Analog	CVBS (SDI B Channel)
3G-SDI	2.970Gb/s
HD-SDI	1.485Gb/s
SD-SDI	270Mb/s
HDMI (PC & HDMI mode)	1080p(60)/1080i(60)/720p(60)/480p(60)/576p(50)


Analog Input Specification	
CVBS	CVBS: 1.0Vpp (with Sync)

SDI Input Signal Formats	
SMPTE-425M-A/B	1080i(60/59.94/50)
	1080p (60/59.94/50/30/29.97/25/24/23.98/30sF/29.97sF/25sF/24sF/23.98sF)
SMPTE-274M	1080i (60 / 59.94 / 50)
	1080p (30/29.97/25/24/24sF/23.98/23.98sF)
SMPTE-296M	720p (60/59.94/50)
SMPTE-260M	1035i (60/59.94)
SMPTE-125M	480i (59.94)
ITU-R BT.656	576i (50)
2K Format	2048 x 1080p (24/24sF/23.98/23.98sF)

Audio In	Embedded Audio / Analog stereo (Phone Jack)
Audio Out	Analog stereo (Phone Jack) / Internal Speaker (Mixed Mono)
Power	DC 12V / 24V
Power Consumption (Approx.)	DC 24 Watts (Max. 2A)
Operating Temperature	0°C to 45°C (32°F to 113°F)
Storage Temperature	-20°C to 60°C (-4°F to 140°F)
Included Accessories	AC Power Cable DC Power Adaptor Table Stand

Main Body Dimensions

Main Body 223 x 175 x 60 (mm) / 8.78 x 6.89 x 2.36 (inch)
With Stand 260 x 194.2 x 90 (mm) / 10.24 x 7.65 x 3.54 (inch)
Weight 2.1Kg / 4.63lbs

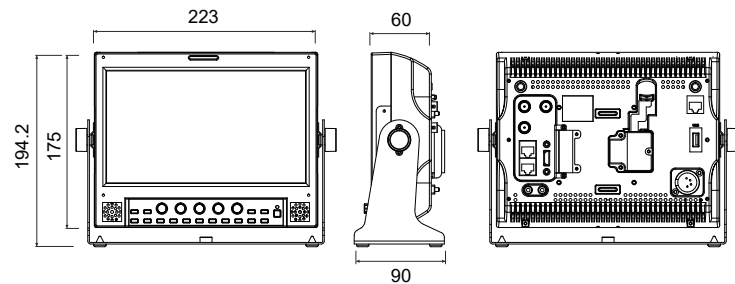

Product Highlights

- 9" Full HD Resolution (1920 x 1080)
- Waveform / Vectorscope
- 16ch Audio Level Meter
- Focus Assist
- Marker
- Timecode Display
- Dynamic UMD
- Blue/Mono Only
- H/V Delay
- Luma(Y) Zone Check
- Range Error
- SCAN / Pixel-to-Pixel
- Zoom
- User Aspect
- Various Scan Modes
- Closed Caption (CC-608, CC-708)
- Tally
- GPI Control

Optional Accessories

